


BE Informed!

MANDATORY SF 3000 RECEIVER UPDATE INSTRUCTIONS USING A 2630 DISPLAY

**Before beginning, please make sure you have 45 minutes to an hour of uninterrupted time for the update to complete.*

- To begin, plug in USB drive. Then, a message will appear and prompt you to do an update. ****IMPORTANT: CANCEL** that update, and follow these instructions.
- From the startup screen, select the **Menu** button in the bottom right hand corner, then select the **Message Center** icon.

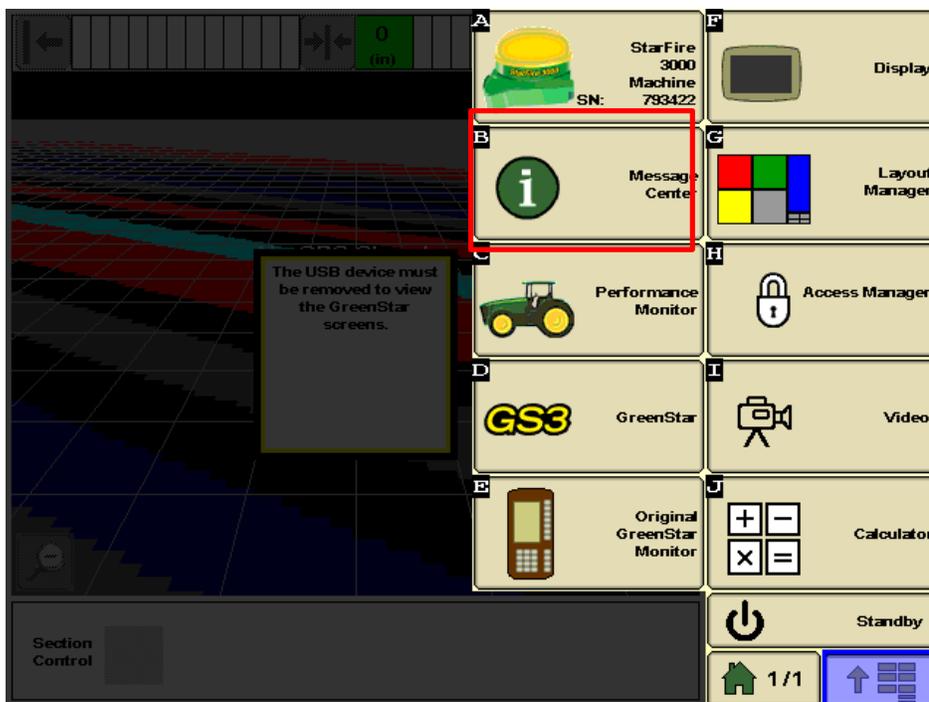

IMPORTANT RECEIVER UPDATE INSTRUCTIONS *continued*

- At the Message Center screen, select the Reprogram icon (*if not already selected*).
- Press the down arrow one time, and it should highlight the GPS Receiver component.
- After it is highlighted, press the Reprogram Device button.

***Note:** 2.80S is the software version needed. Make sure it is listed below the current version of software (*2.70A was the current version in this example*)

Message Center - Reprogram Device

System Bundle Version: V_3.36.1073_130B


Component	Software Version
GreenStar Display 2630 updated --/--	V_3.36.1073 USB: V_3.36.1073
GPS Receiver	2.70A USB: 2.80S
App Controller 1120	----- USB: 1.51Y
AirCart Controller	----- USB: 0.11A
App Controller	----- USB: 3,14A

Reprogram Device

The screenshot shows a mobile application interface for reprogramming a device. At the top, it displays the system bundle version. Below that is a table with two columns: 'Component' and 'Software Version'. The 'GPS Receiver' row is highlighted in pink. To the right of the table is a vertical menu of icons labeled A through J, including 'Reprogram', 'Main', 'Cleanup', 'Addresses', 'Diagnostics', 'Control Unit', and 'Bus'. At the bottom, there is a 'Reprogram Device' button and a '11:05pm' time display. A red box highlights the 'Reprogram' icon in the menu, and another red box highlights the 'Reprogram Device' button. A blue box highlights the down arrow on the left side of the table.

IMPORTANT RECEIVER UPDATE INSTRUCTIONS *continued*

- The next page will offer a dropdown window.
(2.80S should be the only one available when you tap the window with the 4 dashes)
- Select 2.80S, and it will place it in the blank beside “Change to version”.

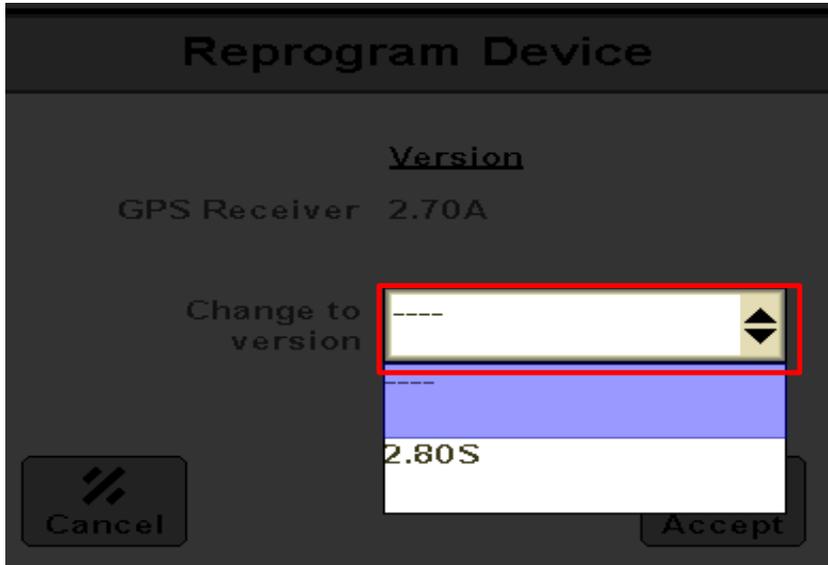

- Press the Accept box.
Again – You will need to make sure you have 45 minutes to an hour. After it is complete, there will be a notification.

